

April 5, 2015
White Paper

Michael Sweet 2015-2-3 7:55 AM
Deleted: January 23

IPP 3D Printing Extensions 0.1 (3D)

Status: Initial

Abstract: This white paper defines an extension to the Internet Printing Protocol that supports printing of physical objects by Additive Manufacturing devices such as 3D printers.

This document is a White Paper. For a definition of a "White Paper", see:

<http://ftp.pwg.org/pub/pwg/general/pwg-process30.pdf>

[This document is provided for informational purposes as a contribution to the IEEE-ISTO Printer Working Group and is subject to the IEEE-ISTO PWG Intellectual Property Policy located at:](#)

http://www.pwg.org/chair/membership_docs/pwg-ip-policy.pdf

This document is available electronically at:

<http://ftp.pwg.org/pub/pwg/ipp/ws/wd-sweet-ipp3d-20150405.docx>

<http://ftp.pwg.org/pub/pwg/ipp/ws/wd-sweet-ipp3d-20150405.pdf>

Michael Sweet 2015-1-26 7:45 AM
Deleted: 20150123

Michael Sweet 2015-1-26 7:45 AM
Deleted: 20150123

Table of Contents

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46

- 1. Introduction 5
- 2. Terminology 5
 - 2.1 Terms Used in This Document 5
 - 2.2 Acronyms and Organizations 6
- 3. Rationale for IPP 3D Printing Extensions 7
 - 3.1 Use Cases 7
 - 3.1.1 Print a 3D Object 7
 - 3.1.2 Print a 3D Object Using Loaded Materials 7
 - 3.1.3 Print a 3D Object with Multiple Materials 7
 - 3.1.4 View a 3D Object During Printing 8
 - 3.2 Exceptions 8
 - 3.2.1 Clogged Extruder 8
 - 3.2.2 Extruder Temperature Out of Range 8
 - 3.2.3 Extruder Head Movement Issues 8
 - 3.2.4 Filament Feed Jam 8
 - 3.2.5 Filament Feed Skip 8
 - 3.2.6 Material Empty 8
 - 3.2.7 Material Adhesion Issues 9
 - 3.2.8 Print Bed Temperature Out of Range 9
 - 3.2.9 Print Bed Not Clear 9
 - 3.3 Out of Scope 9
 - 3.4 Design Requirements 9
- 4. Technical Solutions/Approaches 10
 - 4.1 High-Level Model 10
 - 4.1.1 Build Platforms 11
 - 4.1.2 Cameras 11
 - 4.1.3 Cutters 11
 - 4.1.4 Fans 11
 - 4.1.5 Lamps 11
 - 4.1.6 Lasers 11
 - 4.1.7 Markers (or Extruders) 11
 - 4.1.8 Motors 11
 - 4.1.9 Reservoirs 11
 - 4.2 Coordinate System 12
- 5. New Attributes 12
 - 5.1 Job Template Attributes 12
 - 5.1.1 materials-col (1setOf collection) 12
 - 5.1.2 print-fill-density (integer(0:100)) 14
 - 5.1.3 print-fill-thickness (integer(0:MAX)) 14
 - 5.1.4 print-layer-thickness (integer(0:MAX)) 14
 - 5.1.5 print-rafts (type2 keyword) 14
 - 5.1.6 print-shell-thickness (integer(0:MAX)) 15
 - 5.1.7 print-supports (type2 keyword) 15
 - 5.1.8 printer-bed-temperature (integer | no-value) 15
 - 5.1.9 printer-chamber-temperature (integer | no-value) 15

Michael Sweet 2015-4-5 4:51 PM
 Deleted: Copyright © 2015 Apple Inc. All rights reserved. ... [1]

50	5.1.10 printer-fan-speed (integer(0:100)).....	15
51	5.2 Printer Description Attributes.....	15
52	5.2.1 materials-col-database (1setOf collection)	15
53	5.2.2 materials-col-default (1setOf collection)	16
54	5.2.3 materials-col-ready (1setOf collection)	16
55	5.2.4 materials-col-supported (1setOf type2 keyword)	16
56	5.2.5 material-diameter-supported (1setOf (integer rangeOfInteger))	16
57	5.2.6 material-feed-rate-supported (1setOf (integer rangeOfInteger)).....	16
58	5.2.7 material-type-supported (1setOf type2 keyword).....	16
59	5.2.8 print-fill-density-default (integer(0:100)).....	16
60	5.2.9 print-fill-thickness-default (integer(0:MAX))	16
61	5.2.10 print-fill-thickness-supported (1setOf (integer(0:MAX)	
62	rangeOfInteger(0:MAX))).....	16
63	5.2.11 print-layer-order (type1 keyword).....	17
64	5.2.12 print-layer-thickness-default (integer(0:MAX)).....	17
65	5.2.13 print-layer-thickness-supported (1setOf (integer(0:MAX)	
66	rangeOfInteger(0:MAX))).....	17
67	5.2.14 print-rafts-default (type2 keyword).....	17
68	5.2.15 print-rafts-supported (1setOf type2 keyword)	17
69	5.2.16 print-shell-thickness-default (integer(0:MAX))	17
70	5.2.17 print-shell-thickness-supported (1setOf (integer(0:MAX)	
71	rangeOfInteger(0:MAX))).....	17
72	5.2.18 print-supports-default (type2 keyword)	17
73	5.2.19 print-supports-supported (1setOf type2 keyword)	17
74	5.2.20 printer-bed-temperature-default (integer no-value).....	17
75	5.2.21 printer-bed-temperature-supported (1setOf (integer rangeOfInteger)).....	18
76	5.2.22 printer-chamber-temperature-default (integer no-value).....	18
77	5.2.23 printer-chamber-temperature-supported (1setOf (integer rangeOfInteger))... 18	
78	5.2.24 printer-fan-speed-default (integer(0:MAX)).....	18
79	5.2.25 printer-fan-speed-supported (boolean).....	18
80	5.2.26 printer-head-temperature-supported (1setOf integer rangeOfInteger)	18
81	5.2.27 filament-retraction-distance-supported (1setOf (integer(0:MAX)	
82	rangeOfInteger(0:MAX))).....	18
83	5.2.28 filament-speed-supported (1setof (integer(0:MAX) rangeOfInteger(0:MAX))) 18	
84	5.2.29 print-speed-supported (1setOf integer(1:MAX) rangeOfInteger(1:MAX))	18
85	5.2.30 printer-accuracy-supported (collection)	19
86	5.2.31 printer-volume-supported (collection)	19
87	5.3 Printer Status Attributes	19
88	5.3.1 printer-bed-temperature-current (integer no-value)	19
89	5.3.2 printer-chamber-temperature-current (integer no-value)	19
90	5.3.3 printer-fan-speed-current (integer(0:100))	19
91	5.3.4 printer-head-temperature-current (1setOf (integer no-value))	19
92	5.4 Other Potential Attributes	19
93	6. New Values for Existing Attributes.....	20
94	6.1 ipp-features-supported (1setOf type2 keyword).....	20
95	6.2 printer-state-reasons (1setOf type2 keyword).....	20

96 7. Object Definition Languages (ODLs)21
 97 7.1 Additive Manufacturing Format (AMF)21
 98 7.2 Standard Tessellation Language (STL).....21
 99 7.3 G-Code.....21
 100 7.4 S3G/X3G File Format.....21
 101 8. Internationalization Considerations22
 102 9. Security Considerations23
 103 10. References.....23
 104 11. Author's Address.....25
 105 12. Change History26
 106 12.1 April 5, 201526
 107 12.2 January 23, 2015.....26

List of Figures

111 Figure 1 - Typical Build Platform Coordinate System12

List of Tables

115 Table 1 - 3D Printer Subunits.....10

Michael Sweet 2015-4-5 11:24 PM
 Deleted: 1. Introduction . 6 .

Michael Sweet 2015-4-5 11:23 PM
 Deleted: No table of figures entries found. In your document, select the words to include in the table of contents, and then on the Home tab, under Styles, click a heading style. Repeat for each heading that you want to include, and then insert the table of contents in your document. To manually create a table of contents, on the Document Elements tab, under Table of Contents, point to a style and then click the down arrow button. Click one of the styles under Manual Table of Contents, and then type the entries manually. Figure 1 - An Example Figure . 4 .

Michael Sweet 2015-3-2 8:48 AM
 Deleted: Table 1 - An Example Table . 4 .

134 1. Introduction

135 This white paper defines an extension to the Internet Printing Protocol (IPP) that supports
136 printing of physical objects by Additive Manufacturing devices such as three-dimensional
137 (3D) printers. The attributes and values defined in this document have been prototyped
138 using the CUPS software [CUPS].

139 The primary focus of this document is on popular Fused Deposition Modeling (FDM)
140 devices that melt and extrude ABS and PLA filaments in layers to produce a physical, 3D
141 object. However, the same attributes can be used for other types of 3D printers that use
142 different methods and materials such as Laser Sintering of powdered materials and curing
143 of liquids using ultraviolet light.

144 This document also does not address the larger issue of choosing a common Object
145 Definition Language (ODL) for interoperability, however there are suggested MIME media
146 type names listed in section 7 for several formats in common use.

147 2. Terminology

148 2.1 Terms Used in This Document

149 *Additive Manufacturing*: A 3D printing process where material is progressively added to
150 produce the final output.

151 *Binder Jetting*: A 3D printing process that uses a liquid binder that is jetted to fuse layers of
152 powdered materials.

153 *Digital Light Processing*: A 3D printing process that uses light with a negative image to
154 selectively cure layers of a liquid material.

155 *Fused Deposition Modeling*: A 3D printing process that extrudes a molten material to draw
156 layers.

157 *Laser Sintering*: A 3D printing process that uses a laser to melt and fuse layers of
158 powdered materials.

159 *Material Jetting*: A 3D printing process that jets the actual build materials in liquid or molten
160 state to produce layers.

161 *Selective Deposition Lamination*: A 3D printing process that laminates cut sheets of
162 material.

163 *Stereo Lithography*: A 3D printing process that uses a laser to cure and fuse layers of
164 liquid materials.

Michael Sweet 2015-4-5 11:24 PM

Deleted: 5

166 *Subtractive Manufacturing*: A 3D printing process where material is progressively removed
167 to produce the final output.

Michael Sweet 2015-4-5 4:52 PM

Deleted: *ti*

168 **2.2 Acronyms and Organizations**

169 *CNC*: Computer Numerical Control

170 *DLP*: Digital Light Processing

171 *FDM*: Fused Deposition Modeling

172 *IANA*: Internet Assigned Numbers Authority, <http://www.iana.org/>

173 *IETF*: Internet Engineering Task Force, <http://www.ietf.org/>

174 *ISO*: International Organization for Standardization, <http://www.iso.org/>

175 *PWG*: Printer Working Group, <http://www.pwg.org/>

176 *SD*: SD Card Association, <http://www.sdcard.org/>

177 *SDL*: Selective Deposition Lamination

178 *SL*: Stereo Lithography

179 *USB*: Universal Serial Bus, <http://www.usb.org/>

180

182 3. Rationale for IPP 3D Printing Extensions

183 Existing specifications define the following:

- 184 1. IPP/2.0 Second Edition [PWG5100.12] defines version 2.0, 2.1, and 2.2 of the
185 Internet Printing Protocol which defines a standard operating and data model,
186 interface protocol, and extension mechanism to support traditional Printers;
- 187 2. IPP Everywhere [PWG5100.14] defines a profile of existing IPP specifications,
188 standard Job Template attributes, and standard document formats;
- 189 3. The Standard Specification for Additive Manufacturing File Format (AMF)
190 Version 1.1 [ISO52915] defines an XML schema and file format for describing
191 3D objects with one or more materials;
- 192 4. The SLC File Specification [STLFORMAT] defines a file format (commonly
193 called "STL files") for describing 3D object with a single material;
- 194 5. The Interchangeable Variable Block Data Format for Positioning, Contouring,
195 and Contouring/Positioning Numerically Controlled Machines [RS274D] defines
196 the "G-code" format that is commonly used by 3D printers; and
- 197 6. The S3G protocol [S3G] defines a simple network protocol and file format for
198 controlling 3D printers.

199 Therefore, this IPP 3D Printing Extensions (3D) document should define IPP attributes,
200 values, and operations needed to support printing of 3D objects, status monitoring of 3D
201 printers and print jobs, and configuration of 3D printer characteristics and capabilities.

202 3.1 Use Cases

203 3.1.1 Print a 3D Object

204 Jane is viewing a 3D object and wishes to print it. After initiating a print action, she selects
205 a 3D printer on the network, specifies material and print settings, and submits the object
206 for printing.

207 3.1.2 Print a 3D Object Using Loaded Materials

208 Jane is viewing a 3D object and wishes to print it. After initiating a print action, she selects
209 a 3D printer on the network that has the material(s) she wishes to use, specifies additional
210 print settings, and submits the object for printing.

211 3.1.3 Print a 3D Object with Multiple Materials

212 Jane wants to print a multi-material object on a single-material Printer. Jane uses software
213 on her Client device to create Document data that instructs the Printer to pause printing
214 and provide status information at specific layers so that she can change materials at the
215 Printer and resume printing with the new material.

216 3.1.4 View a 3D Object During Printing

217 Jane has submitted a 3D print Job that will take 4 hours to complete. She can visually
218 monitor the progress of the Job through a web page provided by the Printer.

219 3.2 Exceptions**220 3.2.1 Clogged Extruder**

221 While printing a 3D object, the extruder becomes clogged. The printer stops printing and
222 sets the corresponding state reason to allow Jane's Client device to discover the issue and
223 display an appropriate alert.

224 3.2.2 Extruder Temperature Out of Range

225 While printing a 3D object, the extruder temperature goes out of range for the material
226 being printed. The printer pauses printing until the temperature stabilizes and sets the
227 corresponding state reason to allow Jane's Client device to discover the issue and display
228 an appropriate alert.

229 3.2.3 Extruder Head Movement Issues

230 While printing a 3D object, the extruder head movement becomes irregular. The Printer
231 stops printing and sets the corresponding state reason to allow Jane's Client device to
232 discover the issue and display an appropriate alert.

233 3.2.4 Filament Feed Jam

234 While printing a 3D object, the filament jams and cannot be fed into the extruder. The
235 printer stops printing and sets the corresponding state reason to allow Jane's Client device
236 to discover the issue and display an appropriate alert.

237 3.2.5 Filament Feed Skip

238 While printing a 3D object, the filament extrusion rate is insufficient to maintain proper
239 printing. The printer stops printing and sets the corresponding state reason to allow Jane's
240 Client device to discover the issue and display an appropriate alert.

241 3.2.6 Material Empty

242 While printing a 3D object, the printer runs out of the printing material. The printer pauses
243 printing until more material is loaded and sets the corresponding state reason to allow
244 Jane's Client device to discover the issue and display an appropriate alert.

245 **3.2.7 Material Adhesion Issues**

246 While printing a 3D object, the printed object releases from the build platform or the current
247 layer is not adhering to the previous one. The printer stops printing and sets the
248 corresponding state reason to allow Jane's Client device to discover the issue and display
249 an appropriate alert.

250 **3.2.8 Print Bed Temperature Out of Range**

251 While printing a 3D object, the print bed temperature goes out of the requested range. The
252 printer pauses printing until the temperature stabilizes and sets the corresponding state
253 reason to allow Jane's Client device to discover the issue and display an appropriate alert.

254 **3.2.9 Print Bed Not Clear**

255 When starting to print a 3D object, the Printer detects that the build platform is not
256 empty/clear. The Printer stops printing and sets the corresponding state reason to allow
257 Jane's Client device to discover the issue and display an appropriate alert. The Printer
258 starts printing once the build platform is cleared.

259 **3.3 Out of Scope**

260 The following are considered out of scope for this document:

- 261 1. Definition of new file formats; and
- 262 2. Support for Subtractive Manufacturing technologies such as CNC milling
- 263 machines.

264 **3.4 Design Requirements**

265 The design requirements for this document are:

- 266 1. Define attributes and values to describe supported and loaded (ready) materials
- 267 used for FDM; and
- 268 2. Define attributes and values to describe FDM printer capabilities and state

269 The design recommendations for this document are:

- 270 1. Support 3D printing technologies other than FDM

271

272 4. Technical Solutions/Approaches

273 Current 3D printers offer limited connectivity and status monitoring capabilities. Many
274 printers simply print G-code files from SD memory cards, with all interaction and status
275 monitoring happening at the printer's console.

276 Makerbot Industries uses a proprietary protocol [S3G] and file format that generalizes
277 some aspects of the interface between a host device and 3D printer. However, this
278 solution is highly specific to FDM printing and does not offer any spooling or security
279 functionality.

280 Various other proprietary protocols and interfaces are also in use, typically based on the
281 USB serial protocol class for direct connection to a host device. And there are a number of
282 Cloud-based solutions emerging that utilize a proxy device that communicates with the
283 Cloud and 3D printer.

284 Given that the 3D printing industry and technologies are still undergoing a great deal of
285 change and development, certain aspects of 3D printing may be difficult or infeasible to
286 standardize. However, a stable, reliable, and secure interface between host device (IPP
287 Client) and 3D printer (IPP Printer) can be defined today in a way that allows for future
288 changes to be incorporated without difficulty.

289 4.1 High-Level Model

290 IPP [RFC2911] and the IETF Printer MIB [RFC3805] already define a comprehensive
291 model for the operation and data elements of a typical 2D printer. The IPP Job processing
292 model matches how 3D printers process Jobs and Documents. However, more types of
293 subunits are used in a 3D printer, requiring additions to the model and state values. Table
294 1 lists the subunits of 3D printers for different technologies.

295 **Table 1 - 3D Printer Subunits**

Subunit	Technology
Build Platforms	All
Cameras	All
Cutters	SDL
Doors	All
Fans	FDM
Input Trays	SDL
Lamps	DLP
Lasers	Laser Sintering, SL
Marker Supplies	All
Markers (or Extruders)	Many
Media Path	SDL
Motors	All
Reservoirs	DLP, Laser Sintering, SL

Michael Sweet 2015-4-5 5:16 PM

Deleted: , and this interface does offer an improved printing experience from the host device

Michael Sweet 2015-1-26 7:54 AM

Deleted: d

300 4.1.1 Build Platforms

301 Build Platforms hold the printed object. The platform typically moves up or down during
302 printing as layers are applied, although in some cases it moves along all three axis.

303 4.1.2 Cameras

304 Cameras typically show the Build Platforms, offering a visual progress/status reporting for
305 remote users.

306 4.1.3 Cutters

307 Cutters are used to trim support material on printed objects and/or remove regions of
308 media that are not part of the final printed object.

309 4.1.4 Fans

310 Fans are used to cool printed material and maintain proper extruder and material
311 temperatures.

312 4.1.5 Lamps

313 Lamps are used by DLP printers to provide an ultraviolet light source for curing the liquid
314 material while printing a layer. Lamps are also used to illuminate the Build Platforms.

315 4.1.6 Lasers

316 Lasers are used by Laser Sintering and Stereo Lithography (SL) printers to fuse powdered
317 material or cure liquid material while printing a layer.

318 4.1.7 Markers (or Extruders)

319 Markers can be traditional subunits where an image is printed on sheets of paper (SDL),
320 extruders that place material onto the Build Platform or previous layer, or projectors that
321 display an inverse image on the surface of a liquid material (DLP).

322 4.1.8 Motors


323 Motors are used to move the Build Platforms and (in some cases) move the Markers.

324 4.1.9 Reservoirs

325 Reservoirs hold liquid or powdered material used to create the printed object.

326 4.2 Coordinate System

327 3D printers operate in three dimensions and thus have three axis of movement. [Figure 1](#)
 328 [shows the coordinate system where the X axis represents the width of the object, the Y](#)
 329 [axis represents the depth of the object, and the Z axis represents the height of the object.](#)

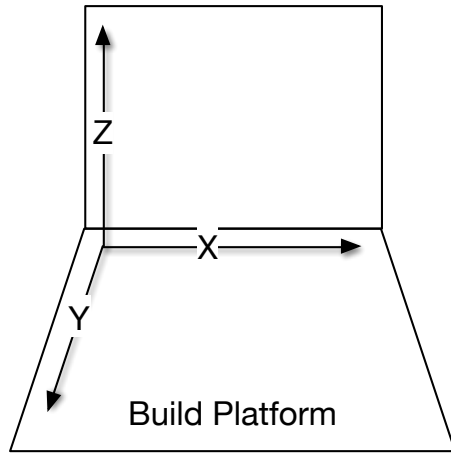

330
 331 [Figure 1 - Typical Build Platform Coordinate System](#)

332 [Filament usage by extrusion Printers is sometimes also modeled as an additional "E" axis,](#)
 333 [e.g., E1 for the first filament, E2 for the second filament, etc.](#)

334 5. New Attributes

335 5.1 Job Template Attributes

336 5.1.1 materials-col (1setOf collection)

337 This Job Template attribute defines the materials to be used for the Job. [When specified,](#)
 338 [the Printer validates the requested materials both when the Job is created and when it](#)
 339 [enters the 'processing' state. If the requested materials are not loaded, the 'material-](#)
 340 [needed' keyword is added to the Printer's "printer-state-reasons" values and the Job is](#)
 341 [placed in the 'processing-stopped' state.](#)

342 [The Client typically supplies "materials-col" values matching those returned in the](#)
 343 ["material-cols-database" \(section 5.2.1\) or "materials-col-ready" \(section 5.2.3\) Printer](#)
 344 [Description attributes.](#)

Michael Sweet 2015-4-5 9:20 PM

Deleted: The

Michael Sweet 2015-4-5 9:16 PM

Deleted: [Editor's note: probably want a figure for this] -

348 5.1.1.1 material-color (type2 keyword)

349 This member attribute provides a PWG media color value representing the color of the
350 material.

351 5.1.1.2 material-diameter (integer)

352 This member attribute provides the diameter of the printed material in nanometers. This
353 attribute is only applicable for Printers that extrude their material.

354 5.1.1.3 material-feed-rate (integer)

355 This member attribute provides the material feed rate in nanometers per second. This
356 attribute is only applicable for Printers that extrude their material.

357 **[Editor's note: Some feedback indicates that we might want to specify feed rate using**
358 **volume...]**

359 5.1.1.4 material-key (keyword)

360 This member attribute provides an unlocalized name of the material that can be localized
361 using the strings file referenced by the "printer-strings-uri" Printer attribute.

362 5.1.1.5 material-name (name(MAX))

363 This member attribute provides a localized name of the material.

364 5.1.1.6 material-type (type2 keyword)

365 This member attribute specifies the type of material. Values include:

366 'abs_filament': Acrylonitrile Butadiene Styrene (ABS) filament.

367 'chocolate_powder': Chocolate powder.

368 'gold_powder': Gold (metal) powder.

369 'photopolymer-resin_liquid': Photopolymer (liquid) resin.

370 'pla_filament': Polylactic Acid (PLA) filament.

371 'pla-conductive_filament': Conductive PLA filament.

372 'pla-flexible_filament': Flexible PLA filament.

373 'silver_powder': Silver (metal) powder.

374 **[Editor's note: This list needs to be expanded significantly...]**

375 5.1.1.7 filament-retraction-distance (integer(0:MAX))

376 This member attribute specifies the filament retraction distance in nanometers. This
377 attribute is only applicable to FDM Printers.

378 5.1.1.8 filament-retraction-speed (integer(0:MAX))

379 This member attribute specifies the filament retraction speed in nanometers per second.
380 This attribute is only applicable to FDM Printers.

381 5.1.1.9 extruder-temperature (integer | rangeOfInteger)

382 This member attribute specifies the desired extruder temperature (or range of
383 temperatures) in degrees Celsius. This attribute is only applicable to Printers that extrude
384 their material.

385 5.1.1.10 print-speed (integer(1:MAX))

386 This member attribute specifies the print speed in nanometers per second.

387 5.1.2 print-fill-density (integer(0:100))

388 This Job Template attribute specifies the fill density of interior regions in percent.

389 5.1.3 print-fill-thickness (integer(0:MAX))

390 This Job Template attribute specifies the thickness of any fill walls in nanometers, with 0
391 representing the thinnest possible walls.

392 Editor's note: One comment requested speed/layer thickness attributes for infill regions.
393 Right now print speed is a materials-col value - do we add a print-fill-material attribute to
394 specify the fill material (which then gives us the speed), or do we move print-speed to a
395 top-level attribute and then have print-fill-speed and print-shell-speed?

396 5.1.4 print-layer-thickness (integer(0:MAX))

397 This Job Template attribute specifies the thickness of each layer in nanometers, with 0
398 representing the thinnest possible layers.

399 5.1.5 print-rafts (type2 keyword)

400 This Job Template attribute specifies whether to print brims, rafts, or skirts under the
401 object. Values include:

402 'none': Do not print brims, rafts, or skirts.

403 brim-N': Print brims using the Nth material, where N is an integer from 1 to the
404 number of materials specified for the Job.

405 raft-N': Print rafts using the Nth material, where N is an integer from 1 to the number
 406 of materials specified for the Job.

407 skirt-N': Print skirts using the Nth material, where N is an integer from 1 to the
 408 number of materials specified for the Job.

409 'standard': Print brims, rafts, and/or skirts using implementation-defined default
 410 parameters.

411 **5.1.6 print-shell-thickness (integer(0:MAX))**

412 This Job Template attribute specifies the thickness of exterior walls in nanometers, with 0
 413 representing the thinnest possible wall.

414 **5.1.7 print-supports (type2 keyword)**

415 This Job Template attribute specifies whether to print supports under the object. Values
 416 include:

417 'none': Do not print supports.

418 'standard': Print supports using implementation-defined default parameters.

419 'material-N': Print supports using the Nth material, where N is an integer from 1 to
 420 the number of materials for the Job.

421 **5.1.8 printer-bed-temperature (integer | no-value)**

422 This Job Template attribute specifies the desired Build Platform temperature in degrees
 423 Celsius. The 'no-value' value is used to disable temperature control on the Build Platform.

424 **5.1.9 printer-chamber-temperature (integer | no-value)**

425 This Job Template attribute specifies the desired print chamber temperature in degrees
 426 Celsius. The 'no-value' value is used to disable temperature control in the print chamber.

427 **5.1.10 printer-fan-speed (integer(0:100))**

428 This Job Template attribute specifies the desired fan speed in percent of maximum. A
 429 value of 0 turns the fans off during printing.

430 **5.2 Printer Description Attributes**

431 **5.2.1 materials-col-database (1setOf collection)**

432 This Printer Description attribute lists the pre-configured materials for the Printer. Each
 433 value contains the corresponding "materials-col" member attributes and will typically reflect
 434 vendor and site ("third party") materials that are supported by the Printer.

Michael Sweet 2015-4-5 11:06 PM

Deleted: 'material-N': Print rafts using the Nth material, where N is an integer from 1 to the number of materials for the Job. .

438 5.2.2 materials-col-default (1setOf collection)

439 This Printer Description attribute lists the default materials that will be used if the
440 "materials-col" Job Template attribute is not specified.

441 5.2.3 materials-col-ready (1setOf collection)

442 This Printer Description attribute lists the materials that have been loaded into the Printer.
443 Each value contains the corresponding "materials-col" member attributes.

444 5.2.4 materials-col-supported (1setOf type2 keyword)

445 This Printer Description attribute lists the "materials-col" member attributes that are
446 supported by the Printer.

447 5.2.5 material-diameter-supported (1setOf (integer | rangeOfInteger))

448 This Printer Description attribute lists the supported diameters (or ranges of diameters) of
449 extruded material in nanometers.

450 5.2.6 material-feed-rate-supported (1setOf (integer | rangeOfInteger))

451 This Printer Description attribute lists the supported feed rates (or ranges of feed rates) in
452 nanometers per second.

453 [Editor's note: Some feedback indicates that we might want to specify feed rate using
454 volume...]

455 5.2.7 material-type-supported (1setOf type2 keyword)

456 This Printer Description attribute lists the supported material types for the Printer.

457 5.2.8 print-fill-density-default (integer(0:100))

458 This Printer Description attribute specifies the default "print-fill-density" value in percent.

459 5.2.9 print-fill-thickness-default (integer(0:MAX))

460 This Printer Description attribute specifies the default "print-fill-thickness" value in
461 nanometers.

**462 5.2.10 print-fill-thickness-supported (1setOf (integer(0:MAX) |
463 rangeOfInteger(0:MAX)))**

464 This Printer Description attribute lists the supported "print-fill-thickness" values (or ranges
465 of values) in nanometers.

466 5.2.11 print-layer-order (type1 keyword)

467 This Printer Description attribute specifies the order of layers when printing, either 'top-to-
468 bottom' or 'bottom-to-top'.

469 5.2.12 print-layer-thickness-default (integer(0:MAX))

470 This Printer Description attribute specifies the default "print-layer-thickness" value in
471 nanometers.

**472 5.2.13 print-layer-thickness-supported (1setOf (integer(0:MAX) |
473 rangeOfInteger(0:MAX)))**

474 This Printer Description attribute lists the supported values (or ranges of values) for the
475 "print-layer-thickness" Job Template attribute.

476 5.2.14 print-rafts-default (type2 keyword)

477 This Printer Description attribute specifies the default "print-rafts" value.

478 5.2.15 print-rafts-supported (1setOf type2 keyword)

479 This Printer Description attribute lists the supported "print-rafts" values.

480 5.2.16 print-shell-thickness-default (integer(0:MAX))

481 This Printer Description attribute specifies the default "print-shell-thickness" value in
482 nanometers.

**483 5.2.17 print-shell-thickness-supported (1setOf (integer(0:MAX) |
484 rangeOfInteger(0:MAX)))**

485 This Printer Description attribute lists the supported "print-shell-thickness" values (or
486 ranges of values) in nanometers.

487 5.2.18 print-supports-default (type2 keyword)

488 This Printer Description attribute specifies the default "print-supports" value.

489 5.2.19 print-supports-supported (1setOf type2 keyword)

490 This Printer Description attribute lists the supported "print-supports" values.

491 5.2.20 printer-bed-temperature-default (integer | no-value)

492 This Printer Description attribute specifies the default "printer-bed-temperature" value in
493 degrees Celsius.

494 **5.2.21 printer-bed-temperature-supported (1setOf (integer | rangeOfInteger))**

495 This Printer Description attribute lists the supported "printer-bed-temperature" values (or
496 ranges of values) in degrees Celsius.

497 **5.2.22 printer-chamber-temperature-default (integer | no-value)**

498 This Printer Description attribute specifies the default "printer-chamber-temperature" value
499 in degrees Celsius.

500 **5.2.23 printer-chamber-temperature-supported (1setOf (integer | rangeOfInteger))**

501 This Printer Description attribute lists the supported "printer-chamber-temperature" values
502 (or ranges of values) in degrees Celsius.

503 **5.2.24 printer-fan-speed-default (integer(0:MAX))**

504 This Printer Description attribute specifies the default "printer-fan-speed" value in percent.

505 **5.2.25 printer-fan-speed-supported (boolean)**

506 This Printer Description attribute specifies whether the "printer-fan-speed" Job Template
507 attribute is supported.

508 **5.2.26 printer-head-temperature-supported (1setOf integer | rangeOfInteger)**

509 This Printer Description attribute specifies the supported "printer-head-temperature" values
510 (or ranges of values) in degrees Celsius.

511 **5.2.27 filament-retraction-distance-supported (1setOf (integer(0:MAX) |**
512 **rangeOfInteger(0:MAX)))**

513 This Printer Description attribute specifies the supported "filament-retraction-distance"
514 values (or ranges of values) in nanometers.

515 **5.2.28 filament-speed-supported (1setof (integer(0:MAX) | rangeOfInteger(0:MAX)))**

516 This Printer Description attribute specifies the supported "filament-speed" values (or
517 ranges of values) in nanometers per second.

518 **5.2.29 print-speed-supported (1setOf integer(1:MAX) | rangeOfInteger(1:MAX))**

519 This Printer Description attribute lists the supported "print-speed" values (or ranges of
520 values) in nanometers per second.

521 5.2.30 printer-accuracy-supported (collection)

522 This Printer Description attribute specifies the absolute accuracy of the Printer. The "x-
523 accuracy (integer(1:MAX))", "y-accuracy (integer(1:MAX))", and "z-accuracy
524 (integer(1:MAX))" member attributes specify the accuracy in nanometers along each axis.

525 5.2.31 printer-volume-supported (collection)

526 This Printer Description attribute specifies the maximum build volume supported by the
527 Printer. The "x-dimension (integer(1:MAX))", "y-dimension (integer(1:MAX))", and "z-
528 dimension (integer(1:MAX))" member attributes specify the size in millimeters along each
529 axis.

530 5.3 Printer Status Attributes**531 5.3.1 printer-bed-temperature-current (integer | no-value)**

532 This Printer Status attribute provides the current Build Platform temperature in degrees
533 Celsius. If the Build Platform is not temperature controlled, the 'no-value' value is returned.

534 5.3.2 printer-chamber-temperature-current (integer | no-value)

535 This Printer Status attribute provides the current print chamber temperature in degrees
536 Celsius. If the print chamber is not temperature controlled, the 'no-value' value is returned.

537 5.3.3 printer-fan-speed-current (integer(0:100))

538 This Printer Status attribute provides the current fan speed in percent.

539 5.3.4 printer-head-temperature-current (1setOf (integer | no-value))

540 This Printer Status attribute provides the current extruder head temperatures in degrees
541 Celsius. The 'no-value' value is returned when the extruder head is not temperature
542 controlled.

543 5.4 Other Potential Attributes

544 Based on existing 3D printer software, the following parameters could also be candidates
545 for standardization:

- 546 1. Initial layer thickness in nanometers
- 547 2. Initial layer line width in percent
- 548 3. Dual extrusion overlap in nanometers
- 549 4. Travel speed in nanometers per second
- 550 5. Bottom layer speed in nanometers per second
- 551 6. Infill speed in nanometers per second
- 552 7. Outer shell speed in nanometers per second

- 553 8. Inner shell speed in nanometers per second
554 9. Minimum layer time in seconds or milliseconds

555 6. New Values for Existing Attributes

556 6.1 ipp-features-supported (1setOf type2 keyword)

557 | This document suggests (but does not register) the new value 'ipp-3d'.

Michael Sweet 2015-4-5 4:54 PM

Deleted: defines

558 6.2 printer-state-reasons (1setOf type2 keyword)

559 | This document suggests (but does not register) the following new values:

Michael Sweet 2015-4-5 4:54 PM

Deleted: defines

- 560 'camera-failure': A camera is no longer working.
561 'cutter-at-eol': A cutter has reached its end-of-life and will need to be replaced soon.
562 'cutter-failure': A cutter has failed.
563 'cutter-near-eol': A cutter is near its end-of-life and may need to be replaced soon.
564 'extruder-failure': An extruder has failed and requires maintenance or replacement.
565 'extruder-jam': An extruder is jammed or clogged.
566 'fan-failure': A fan has failed.
567 'lamp-at-eol': A lamp has reached its end-of-life and will need to be replaced soon.
568 'lamp-failure': A lamp has failed.
569 'lamp-near-eol': A lamp is near its end-of-life and may need to be replaced soon.
570 'laser-at-eol': A laser has reached its end-of-life and will need to be replaced soon.
571 'laser-failure': A laser has failed.
572 'laser-near-eol': A laser is near its end-of-life and may need to be replaced soon.
573 'material-empty': One or more build materials have been exhausted.
574 'material-low': One or more build materials may need replenishment soon.
575 'material-needed': One or more build materials need to be loaded for a processing
576 Job.
577 'motor-failure': A motor has failed.

- 580 'reservoir-empty': One or more reservoirs are empty.
- 581 'reservoir-low': One or more reservoirs are almost empty.
- 582 'reservoir-needed': One or more reservoirs are empty but need to be filled for a
- 583 processing Job.

584 7. Object Definition Languages (ODLs)

585 This section provides information on several commonly used ODLs with either existing
586 (registered) or suggested MIME media types.

587 7.1 Additive Manufacturing Format (AMF)

588 AMF [ISO52915] is a relatively new format that was designed as a replacement for the
589 Standard Tessellation Language (STL). Its use has been hampered by the lack of a freely-
590 available specification, but has several advantages over STL including:

- 591 1. Shared vertices which eliminates holes and other breaks in the surface
- 592 geometry of objects,
- 593 2. Specification of multiple materials in a single file,
- 594 3. Curved surfaces can be specified, and
- 595 4. Coordinates use explicit units for proper output dimensions.

596 The suggested (but not registered) MIME media type is `model/amf`.

Michael Sweet 2015-3-1 7:01 PM

Deleted: 'application'

597 7.2 Standard Tessellation Language (STL)

598 STL [STLFORMAT] is widely supported by existing client software. The registered MIME
599 media type is 'application/sla'.

600 7.3 G-Code

601 The G-code [RS274] format has long been a common low-level format used by 3D
602 printers, with higher level formats being processed on the Client to produce G-code. The
603 suggested (but not registered) MIME media type is 'application/g-code'.

Michael Sweet 2015-4-5 5:13 PM

Deleted: S3G

Michael Sweet 2015-4-5 5:13 PM

Deleted: Protocol and

Michael Sweet 2015-4-5 5:13 PM

Deleted: network

Michael Sweet 2015-4-5 5:14 PM

Deleted: as well

Michael Sweet 2015-4-5 5:14 PM

Deleted: , that provides a serialization of

extrusion commands similar to G-code

Michael Sweet 2015-3-1 7:02 PM

Deleted: x

604 7.4 ~~S3G~~X3G File Format

605 The S3G protocol [S3G] defines a simple protocol for communicating a binary encoding of
606 G-code with a 3D printer. The encoding is also used as a low-level file format, typically
607 using a "x3g" extension. The suggested (but not registered) MIME media type is
608 'application/vnd.makerbot-s3g'.

609

618 8. Internationalization Considerations

619 For interoperability and basic support for multiple languages, conforming implementations
620 MUST support:

- 621 5. The Universal Character Set (UCS) Transformation Format -- 8 bit (UTF-8)
622 [STD63] encoding of Unicode [UNICODE] [ISO10646]; and
- 623 6. The Unicode Format for Network Interchange [RFC5198] which requires
624 transmission of well-formed UTF-8 strings and recommends transmission of
625 normalized UTF-8 strings in Normalization Form C (NFC) [UAX15].

626 Unicode NFC is defined as the result of performing Canonical Decomposition (into base
627 characters and combining marks) followed by Canonical Composition (into canonical
628 composed characters wherever Unicode has assigned them).

629 WARNING – Performing normalization on UTF-8 strings received from IPP Clients and
630 subsequently storing the results (e.g., in IPP Job objects) could cause false negatives in
631 IPP Client searches and failed access (e.g., to IPP Printers with percent-encoded UTF-8
632 URIs now 'hidden').

633 Implementations of this document SHOULD conform to the following standards on
634 processing of human-readable Unicode text strings, see:

635 [Unicode Bidirectional Algorithm \[UAX9\] – left-to-right, right-to-left, and vertical](#)

636 [Unicode Line Breaking Algorithm \[UAX14\] – character classes and wrapping](#)

637 [Unicode Normalization Forms \[UAX15\] – especially NFC for \[RFC5198\]](#)

638 [Unicode Text Segmentation \[UAX29\] – grapheme clusters, words, sentences](#)

639 [Unicode Identifier and Pattern Syntax \[UAX31\] – identifier use and normalization](#)

640 [Unicode Character Encoding Model \[UTR17\] – multi-layer character model](#)

641 [Unicode in XML and other Markup Languages \[UTR20\] – XML usage](#)

642 [Unicode Character Property Model \[UTR23\] – character properties](#)

643 [Unicode Conformance Model \[UTR33\] – Unicode conformance basis+](#)

644 [Unicode Collation Algorithm \[UTS10\] – sorting](#)

645 [Unicode Locale Data Markup Language \[UTS35\] – locale databases](#)

646 9. Security Considerations

647 In addition to the security considerations described in the IPP/1.1: Model and Semantics
648 [RFC2911], the following sub-sections describe issues that are unique to 3D printing.

649 Implementations of this specification SHOULD conform to the following standards on
650 processing of human-readable Unicode text strings, see:

651 [Unicode Security Mechanisms \[UTS39\] – detecting and avoiding security attacks](#)

652 [Unicode Security FAQ \[UNISECFAQ\] – common Unicode security issues](#)

653 [Editor's note: the rest is TBD but will include explosions, fires, and other physical risks that
654 have been documented in the news and various documents and studies]

655 10. References

- 656 [ISO10646] "Information technology -- Universal Coded Character Set (UCS)",
657 ISO/IEC 10646:2011
- 658 [ISO52915] "Standard Specification for Additive Manufacturing File Format (AMF)
659 Version 1.1", ISO/ASTM 52915, 2013
- 660 [PWG5100.12] R. Bergman, H. Lewis, I. McDonald, M. Sweet, "IPP/2.0 Second
661 Edition", PWG 5100.12-2011, February 2011,
662 [http://www.pwg.org/pub/pwg/candidates/cs-ipp20-2011MMDD-
663 5100.12.pdf](http://www.pwg.org/pub/pwg/candidates/cs-ipp20-2011MMDD-5100.12.pdf)
- 664 [PWG5100.14] M. Sweet, I. McDonald, A. Mitchell, J. Hutchings, "IPP Everywhere",
665 PWG 5100.14, January 2013,
666 <http://ftp.pwg.org/pub/pwg/candidates/cs-ippeve10-20130128.pdf>
- 667 [RFC2911] T. Hastings, R. Herriot, R. deBry, S. Isaacson, P. Powell, "Internet
668 Printing Protocol/1.1: Model and Semantics", RFC 2911, September
669 2000, <http://www.ietf.org/rfc/rfc2911.txt>
- 670 [RFC3805] R. Bergman, H. Lewis, I. McDonald, "Printer MIB v2", RFC 3805, June
671 2004, <http://www.ietf.org/rfc/rfc3805.txt>
- 672 [RFC5198] J. Klensin, M. Padlipsky, "Unicode Format for Network Interchange",
673 RFC 5198, March 2008, <http://www.ietf.org/rfc/rfc5198.txt>
- 674 [RS274D] "Interchangeable Variable Block Data Format for Positioning,
675 Contouring, and Contouring/Positioning Numerically Controlled
676 Machines", EIA Standard RS-274-D, February 1979

677	[S3G]	Makerbot Industries, "S3G protocol (formerly RepRap Generation 3 Protocol Specification", 678 679 https://github.com/makerbot/s3g/blob/master/doc/s3gProtocol.md
680	[STD63]	F. Yergeau, "UTF-8, a transformation format of ISO 10646", RFC 681 3629/STD 63, November 2003, http://www.ietf.org/rfc/rfc3629.txt
682	[STLFORMAT]	3D Systems, Inc., "SLC File Specification", 1994
683	[UAX9]	Unicode Consortium, "Unicode Bidirectional Algorithm", UAX#9, June 684 2014, 685 http://www.unicode.org/reports/tr9/tr9-31.html
686	[UAX14]	Unicode Consortium, "Unicode Line Breaking Algorithm", UAX#14, 687 June 2014, 688 http://www.unicode.org/reports/tr14/tr14-33.html
689	[UAX15]	Unicode Consortium, "Normalization Forms", UAX#15, June 2014, 690 http://www.unicode.org/reports/tr15/tr15-41.html
691	[UAX29]	Unicode Consortium, "Unicode Text Segmentation", UAX#29, June 692 2014, 693 http://www.unicode.org/reports/tr29/tr29-25.html
694	[UAX31]	Unicode Consortium, "Unicode Identifier and Pattern Syntax", 695 UAX#31, June 2014, 696 http://www.unicode.org/reports/tr31/tr31-21.html
697	[UNICODE]	Unicode Consortium, "Unicode Standard", Version 7.0.0, June 2014, 698 http://www.unicode.org/versions/Unicode7.0.0/
699	[UNISECFAQ]	Unicode Consortium "Unicode Security FAQ", November 2013, 700 http://www.unicode.org/faq/security.html
701	[UTR17]	Unicode Consortium "Unicode Character Encoding Model", UTR#17, 702 November 2008, 703 http://www.unicode.org/reports/tr17/tr17-7.html
704	[UTR20]	Unicode Consortium "Unicode in XML and other Markup Languages", 705 UTR#20, January 2013, 706 http://www.unicode.org/reports/tr20/tr20-9.html
707	[UTR23]	Unicode Consortium "Unicode Character Property Model", UTR#23, 708 November 2008, 709 http://www.unicode.org/reports/tr23/tr23-9.html

- 710 [\[UTR33\]](#) Unicode Consortium “Unicode Conformance Model”, UTR#33,
- 711 November 2008,
- 712 <http://www.unicode.org/reports/tr33/tr33-5.html>

- 713 [\[UTS10\]](#) Unicode Consortium, “Unicode Collation Algorithm”, UTS#10, June
- 714 2014,
- 715 <http://www.unicode.org/reports/tr10/tr10-30.html>,

- 716 [\[UTS35\]](#) Unicode Consortium, “Unicode Locale Data Markup Language”,
- 717 UTS#35, September 2014,
- 718 <http://www.unicode.org/reports/tr35/tr35-37/tr35.html>

- 719 [\[UTS39\]](#) Unicode Consortium, “Unicode Security Mechanisms”, UTS#39,
- 720 September 2014,
- 721 <http://www.unicode.org/reports/tr39/tr39-9.html>

722 11. Author's Address

723 Primary author:

724 Michael Sweet
 725 Apple Inc.
 726 1 Infinite Loop
 727 MS 111-HOMC
 728 Cupertino, CA 95014
 729 msweet@apple.com

730 The authors would also like to thank the following individuals for their contributions to this
 731 standard:

732 [Oliver Schinagl, Ultimaker B.V.](#)

Michael Sweet 2015-4-5 4:59 PM
Deleted: [UAX15] . M. Davis, M. Duerst, "Unicode Normalization Forms", Unicode Standard Annex 15, March 2008, <http://www.unicode.org/reports/tr10/tr10-30.html> [3]

Michael Sweet 2015-4-5 11:22 PM
Deleted: TBD

740 12. Change History

741 12.1 April 5, 2015

- 742 1. Updated front matter to remove IEEE-ISTO boilerplate.
- 743 2. Fixed various typos
- 744 3. Clarified that SLC files are commonly known as STL files.
- 745 4. Clarified that S3G is a binary version of G-code with a standard packet format.
- 746 5. Added use case for printing with loaded materials
- 747 6. Added use case for multi-material printing on a single material printer.
- 748 7. Added use case for monitoring print progress visually with a web cam.
- 749 8. Added exception for "skipping" (insufficient material flow/feed)
- 750 9. Added exception for adhesion issues
- 751 10. Added exception for build plate being full.
- 752 11. Added exception for head movement issues.
- 753 12. Added figure showing the typical coordinate system.
- 754 13. Expanded Job Template and Printer Description details, added comments for
- 755 discussion.
- 756 14. Added new Unicode considerations and references.

757 12.2 January 23, 2015

758 Initial revision.